


# Tubular Solenoid (Interlock)

MT2057



- High Side-Load Capability
- Optional DC Voltage Ratings
- Bearing-Mounted Stainless Bolt
- Flying Leads with Optional connectors
- Threaded Mounting
- Long Life
- Corrosion Resistant Finish

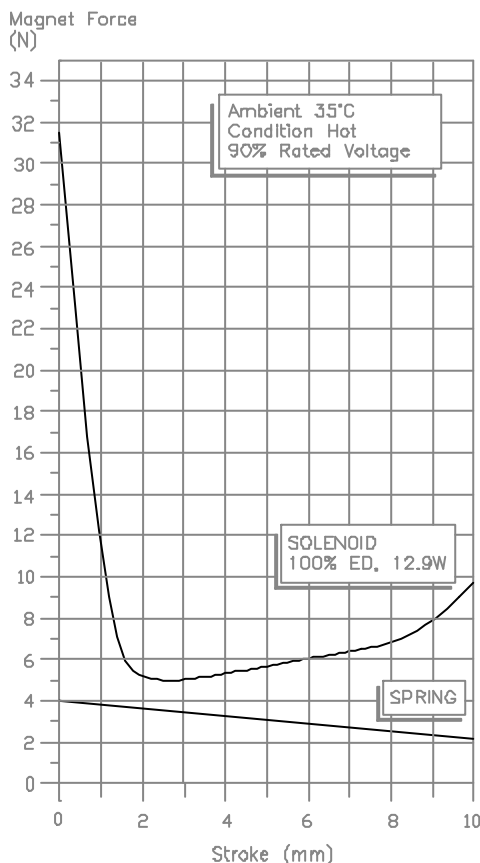

PLUNGER MASS \_\_\_\_\_ 0.078 kg  
 SOLENOID MASS \_\_\_\_\_ 0.460 kg  
 MAX ALLOWABLE RADIAL BOLT LOAD (APPROX)  
 STATIC \_\_\_\_\_ 1500 N  
 DYNAMIC \_\_\_\_\_ 7 N  
 INSULATION CLASS \_\_\_\_\_ F  
 PASSIVATED ZINC BODY

