

Pressure Sensor - EPT2105



Eurosensor

- Long life and proven performance
- Light weight plastic design
- Low cost pressure measuring

The **EPT2105** is based on the proven design of the EPT2100 and optimised for applications with low cost requirements.

The silicon measuring cells used within this design coupled with the high level output circuitry, assures excellent accuracy and long term stability within a light weight design.

The monolithic sensing element is compatible with many medias, including oil and compressed air and is suitable for applications with measuring ranges of 10 and 12 bar.



Specification

Performance

Accuracy @ RT	% of the range < ± 0,5 % at room temp. < ± 2,5 % at -40..105°C	(incl. nonlinearity, hysteresis, repeatability and temperature effects. (New parts: max. drift 0,1% FS/year)
----------------------	--	--

Span	4.0 V
-------------	-------

Output at FS	4.5 V
---------------------	-------

Zero output	0.5 V
--------------------	-------

Response time	10 msec (Measured from initial value to output at 90%)
----------------------	--

Stability/year	% of the range < ± 0.1 %
-----------------------	--------------------------

Pressure range	10 bar, 12 bar
-----------------------	----------------

Overrange pressure	20 bar
---------------------------	--------

Burst pressure	30 bar
-----------------------	--------

Pressure cycles	> 10 million
------------------------	--------------

Environment

Temperature range	-40° to 125°C
--------------------------	---------------

Shock	1000 G, 11 msec., 1/2 Sine
--------------	----------------------------

Vibration	16 G peak, 20 to 2000 Hz
------------------	--------------------------

Sealing	IP 66
----------------	-------

Electronics

Excitation	5 VDC for 0.5 – 4.5 V ratiometric output
-------------------	--

Current consumption	7.5 mA min. 10 mA max.
----------------------------	------------------------

Load resistor	2.5 kΩ
----------------------	--------

Load capacitor	25 nF
-----------------------	-------

Output resistance	10 Ω
--------------------------	------

Output source current	2.0 mA
------------------------------	--------

Output sink current	2.0 mA
----------------------------	--------

Output ratiometricity	0. to 1.1 %
------------------------------	-------------

Isolation resistance to case	100 MΩ
-------------------------------------	--------

Short circuit protection	Yes
---------------------------------	-----

Reverse voltage protection	Yes
-----------------------------------	-----

Mechanics

Housing	Housing PA 6.6 30% GF
----------------	-----------------------

Wetted parts	O-Ring is NBR 70 shore, Aluminum, silicon, silicone-glue
---------------------	--

Pressure port	M18x1.5
----------------------	---------

Electrical connection	Packard connector
------------------------------	-------------------

Weight	> 50 g
---------------	--------




Mounting force max.	8 Nm
----------------------------	------

Ordering Information

Product code: 10 bar version - EPT2105-M18-01000-B-5-C

12 bar version - EPT2105-M18-01200-B-5-C

Dimensions and wiring

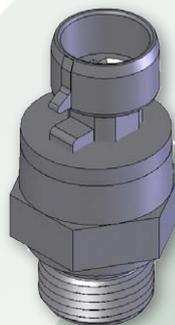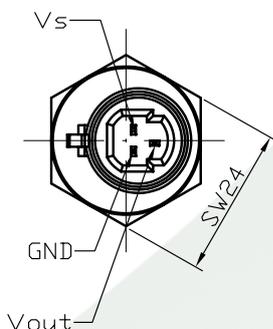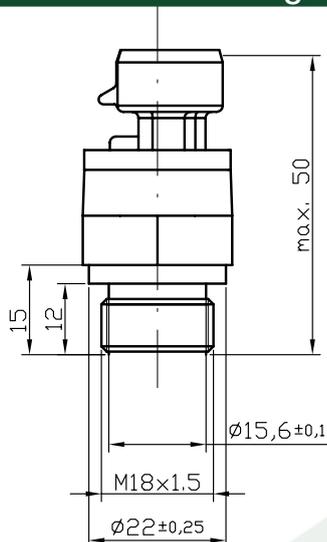

Variohm EuroSensor - Williams' Barn - Tiffeld Road - Towcester - Northants - NN12 6HP - UK
sales@variohm.com • www.variohm.com • +44 (0) 1327 351004

Subject to change without notice