


HS-CE Connection Enclosure

Polycarbonate

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

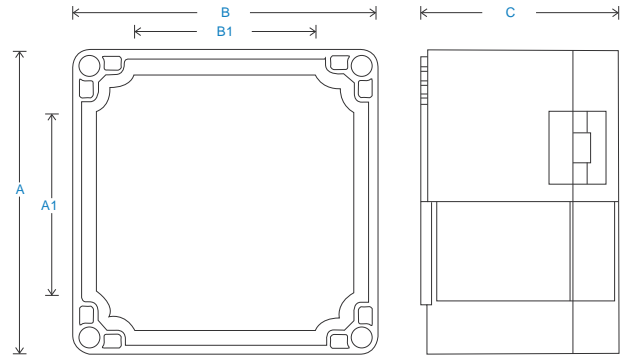

Technical Performance

Inputs	Via accelerometer	Door	Catches
Output	BNC as standard (alternatives can be specified in 'How To Order' table)	Glanding	Glands supplied but not fitted
Mounting Board	Engraved traffolyte panel (customisable upon request)		Holes are punched for: Single input M12 - ø3.5-7mm cable Single input M20 - ø7-13mm multi-core cable
Material	Polycarbonate (to be specified in options of 'How To Order' table)	Labelling	Multi input M20 - 3 x ø5.3mm Channel locations - other labelling available upon request
Dimensions	see: 'How To Order' table	Mounting	supplied are 4 x Brackets
Sealing	IP66	EMC	EN61326-1:2013
Termination	Spring loaded terminal		

How To Order

