


Machined stainless steel housing with 8 PG9 cable gland inlets and 1 PG9 cable gland outlet to the indicator. Adapter sleeves for cell cable from 3.6mm diameter and upwards and rubber plugs for unused inlets are included.

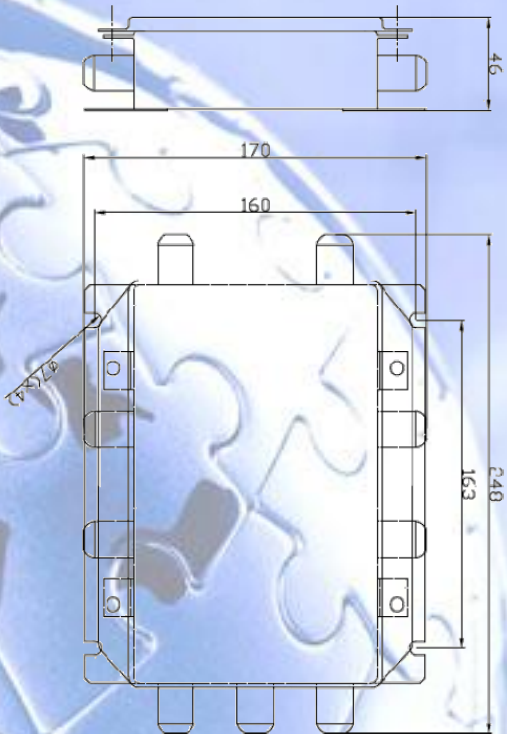

APPLICATIONS

Serial Suma box for interconnection of up to 8 load cells from 350Ω to 1000Ω and indicator.

FEATURES

- Stainless steel case.
- Silicone sheet gasket.
- IP67 protection.
- Regulation with multi-turn precision potentiometers in series.
- Potentiometer range.
 - For 350Ω load cells **5%**
 - For 700Ω load cells **3%**
 - For 1000 Ω load cells **2%**
 - Work temperature **-40 ~130°C**
 - Relative humidity **<85%RH**

CONNECTIONS

